


Key

- B Distance from the keep aperture to the dead bolt aperture.
With KL, kF, KiW, distance from keep aperture to bottom edge of striking plate
- C Height of dead bolt aperture
- D Width of dead bolt aperture
- E Distance from dead bolt aperture to front edge of striking plate
- L Overall length of the striking plate
- T Flange width

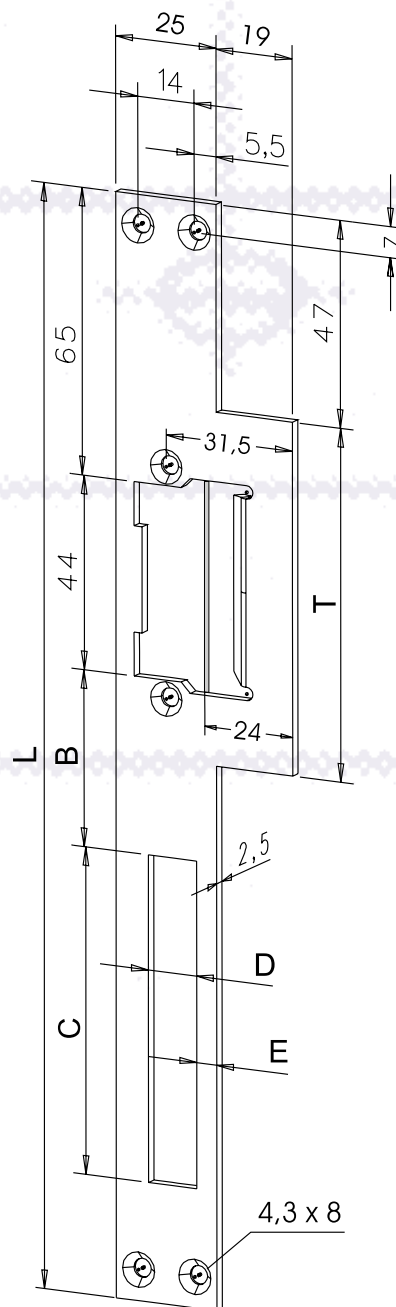


Flat striking plate 165

FLAT STRIKING PLATES

WITH KEEP AND FLANGE
4 FIXING HOLES

Standard see technical drawing left





ORDER DATA	No.	165	166	168	314	
	Surface finishes*	Stainless steel	35	35		
Galvanized and ground						
Polished brass		31				
Yellow chromated						
Gold-coloured		01		01	01	
Grey		02				
Black						
White						
SPECIFICATIONS	Dimensions	A				
		B	40	40		11
		C	74	74		58
		D	12	12		12
		E	5	5		5
		F				
		G				
		H				
		I				
		L	250	250	250	200
		M				
		N				
		O				
		P				
		R				
		S				
	T	80	80	80	100	
	U					
	V					
	X					
DIN orientation required	x	x	x	x		
Strike model	I4 UNI	x		x		
	I4 DIN... (right-hand GRM)					
	I4RR DIN					
	I4S DIN				x	
	I7, I16 UNI					
	I7RR, I16RR UNI					
	I2E		x			
	I42 DIN	x		x		
	I42RR DIN	x		x		
Special features						
				Without dead bolt aperture		

198

* For more information on surface finishes see from page 236

FLAT STRIKING PLATES

WITH KEEP AND FLANGE
4 FIXING HOLES

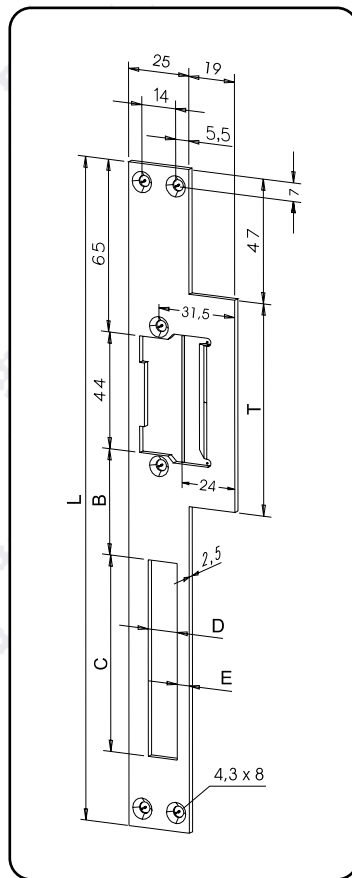

Flat striking plate 165

